

GRADALL® XL 5100 IV



XL 5100 IV

SPECIFICATIONS

Undercarriage

6 x 4 or 6 x 6
Wheelbase: 171" (4.34m)
Width 102" (2.6m)

Frame:
48" (1.2m) wide, welded plate design
65 ksi material

Gross vehicle axle weight rating:
6 x 4 66,000 lb (29,937 kg)
6 x 6 69,000 lb (31,928 kg)

Front axles:
6 x 4: Meritor Model MFS-16-122A, 16,000 lb (7,257 kg) rating
6 x 6: Meritor Model MX19-145, 19,000 lb (8,618 kg) rating, 7.17 ratio

Rear axle:
Meritor Model RT-50-160, 50,000 lb (22,680 kg) rating, 7.17 ratio, single reduction with driver controlled differential lock in front/rear and interaxle differential with lock.

Suspension:
Front: 8 leaf spring with automatic lock-out cylinders
Rear: Hendrickson Equalizer Beam, 8" oscillation

Brakes:
6 x 4 Front: Meritor "Q" Plus Series Cam-Master
Size: 16.5" x 5" (419 mm x 152 mm)
Automatic Slack Adjusters

6 x 6 Front: Meritor "Q" Series Cam-Master
Size: 16.5" x 6" (419 mm x 127 mm)
Automatic Slack Adjusters

Rear: Meritor "P" Series Cam-Master
Size: 16.5" x 7"
(419 mm x 178 mm)
Automatic Slack Adjusters

Spring brake system incorporates emergency and parking brakes on the rear axle. Heated air dryer.

Wheels:
Hub piloted disc 10-stud, 11.25" (286 mm) bolt circle.

Tires:
6x4 front: 385/65R22.5 18-ply on/off highway tread
6x6 front: 425/65R22.5 18-ply on/off highway traction tread

6x4 and 6x6 rear: 11R245 16-ply on/off highway traction tread

Steering:
Ross, integral hydraulic power steering. Gear type power steering pump. 4-quart power steering reservoir with filter and 10 Micron pre-filter.

Standard chassis equipment:
Halogen headlights, tail lights, back-up lights and alarm, stoplights, identification lights front and rear, directional lights, 4-way hazard lights, and instrument panel lights. Windshield wiper/washer, West Coast style mirror system with plane and convex mirrors, front and rear tow hooks, desiccant type air dryer with automatic purge valve and thermostatically controlled heater.

Hydraulic System

PUMPS

One load-sensing axial piston pump; 0-77 GPM (0-291 L/min) total.

One gear pump (pilot & cooling) 11 gpm (41 L/min)

SYSTEM SPECIFICATIONS

Four double acting cylinders

- 1 Boom Cylinder: 3.75" (95mm) bore x 2.75" (70mm) rod x 168 (4267mm) stroke
- 2 Hoist Cylinders: 4.75" (121mm) bore x 3.347" (85mm) rod x 30.5 (775mm) stroke
- 1 Tool Cylinder: 5.0" (127mm) bore x 3.0" (76mm) rod x 25.9" (658mm) stroke

Three hydraulic motors

Swing, 68 Hp (51kW); tilt, 21 Hp (16kW); remote drive, 110 Hp (82kW) total.

Operating pressures

Hoist	4,800 psi (331 Bar)
Tilt	2,500 psi (172 Bar)
Swing	4,500 psi (310 Bar)
Tool	4,800 psi (331 Bar)
Telescope	4,800 psi (331 Bar)
Remote Propel	4,800 psi (331 Bar)
Pilot system	.500 psi (35 Bar)

Oil capacity

Reservoir 50 gallons (189 L), system 70 gallons (265 L). Pressurized reservoir with visual oil level gauge.

Filtration system

5 micron return filter with magnet.
10 micron pilot filter.

Fin and tube-type oil cooler with thermostatically controlled cooling fan.

Pressure-compensated, load-sensing valves with circuit reliefs in all circuits.

Chassis Cab

One-person cab, left-hand mount, isolated from frame on rubber mounts. Acoustical lining. Sun visor. Gauges for oil pressure, coolant temperature, air tank pressures, fuel level, DEF level, voltmeter, speedometer with odometer, tachometer with hour meter. Engine and transmission monitor lights. Engine shutdown controlled by engine electronics. Indicator lights and controls for front axle engagement (6 x 6 only) and rear axle differential lock. Park brake control. Tinted safety glass. Sliding side windows. Fresh air heater and defroster. Dome light. Air suspension seat with seat belt. Vent in door.

Upperstructure Cab

All-weather cab isolated from frame on rubber mounts. Tinted safety glass windows, skylight, acoustical lining, four-way adjustable operator's seat, dome light, filtered air heater and defroster, AM/FM radio, air conditioning, work light package.

The heat source is provided by a fast response, closed circuit hydraulic heater with 20,000 BTU/Hr. capacity.

Front window slides to overhead storage. Mirrors on right and left sides of the machine. Windshield wiper and washer.

Hydraulic Remote Control

Upperstructure powered by undercarriage hydraulics through hydraulic motor and transfer case. Travel and steering pedals in upperstructure cab. Digging brakes and front axle lockout cylinders set automatically with travel pedal in neutral. Parking brake controlled by toggle.

Electrically operated alarm mounted on undercarriage signals remote control movement in either direction, reverse movement when driven from undercarriage cab.

Engine

Detroit Diesel OM926 Tier 4i: diesel with Selective Catalytic Reduction. 4 cycle, inline 6 cylinder, liquid cooled. Turbo/Charge air aftercooled. Off-highway Certified. Electronic controlled. Vertical canister style lube filter attached to engine. Vertical canister style fuel filters, (main and pre-filter) attached to engine. Remote mount primary fuel/water separator. Gross Rating: 282HP @ 2200 RPM. 826 FT LB Torque @ 1200 RPM. Net Rating: 265 HP @ 2200 RPM.

Air Filter: 2-stage dry type with safety element, ejector valve and service indicator.

Electrical System: 24 volt, 70 amp alternator with integral voltage regulator. 2 SAE #C31-S 1000 CCA batteries.

Chassis Cooling Package: Consists of three aluminum bar-plate type coolers stacked vertically: an air-air charge air cooler, radiator, and a transmission cooler. All three coolers are backed by a molded fan shroud and a 28", nine-blade fan driven by a Horton thermostatically controlled, variable-speed fan drive.

Fuel Tank Capacity: 100 gal (378 L)

Urea Tank Capacity: 10.5 gal (40 L)

Transmission: Allison 3500 RDS 6-speed automatic.

Gear Speeds: (with 285/75R24.5 tires)

Gear	1	2	3	4	5	6
MPH	6.3	16.2	24.1	37.4	50.6	59.5
Km/hr	(10.1)	(26.1)	(38.8)	(60.2)	(81.4)	(95.8)

Gear	Rev
MPH	6.4
Km/hr	(10.3)

Drivelines: Spicer 1710 Series with "Half Round" yokes.

Transfer Case: (6 x 4) Cushman Model 479-1, 1:1 Ratio, Pneumatic engage for Remote Propel.

(6 x 6) Cushman Model 479A-1, 1:1 Ratio, Pneumatic engage for Remote Propel and Front Drive.

Upperstructure Controls

Two electronic joysticks (hoist & bucket, telescope & swing), one rocker switch (tilt) control upperstructure. Joysticks are mounted on arm pods that are adjustable for individual operator comfort and convenience. Quick change joystick pattern switch located on instrument panel.

Two foot pedals for remote control of undercarriage steering, travel and digging brakes.

Joysticks and pedals are self-centering; when controls are released, power for movement disengages and swing and travel brakes set automatically.

Engine Controls-Auto Idle & Mode Selector.

Key ignition switch with neutral start and indicator lights for low air, engine status, park brake, travel status, hydraulic fluid temperature and level.

Automatic engine shut down occurs with low oil pressure or high coolant temperature.

Swing

Internal swing gear. Priority swing circuit with axial piston motor. Planetary transmission. Swing speed: 8 rpm.

Swing brake: Automatic spring-set/hydraulic release wet disc parking brake. Dynamic braking is provided by the hydraulic system.

GRADALL Model XL 5100_{TV} 6x4 Lift Capacity Over Side or Rear - LB. (KG.)

LOAD POINT HEIGHT		LOAD RADIUS										
		10' (3.0m)		15' (4.6m)		20' (6.1m)		25' (7.6m)		Maximum Radius	Over End	Over Side
		Over End	Over Side	Over End	Over Side	Over End	Over Side	Over End	Over Side			
Above Ground Level	20' (6.1m)							5715 (2590)	5715 (2590)	27' 4" (8.3m)	5070 (2300)	5070 (2300)
	15' (4.6m)			12425 (5635)	12425 (5635)	8795 (3990)	8795 (3990)	6515 (2955)	6515 (2955)	29' 5" (9.0m)	5120 (2320)	5120 (2320)
	10' (3.0m)					9880 (4480)	9880 (4480)	7140 (3240)	7140 (3240)	30' 6" (9.3m)	5230 (2370)	5230 (2370)
	BOOM LEVEL 8' 8" (2.7m)					10080 (4570)	10080 (4570)	7255 (3290)	7255 (3290)	30' 7" (9.3m)	5265 (2390)	5265 (2390)
	5' (1.5m)					10290 (4665)	10030 (4550)	7415 (3365)	7175 (3255)	30' 7" (9.3m)	5375 (2440)	5195 (2355)
At Ground Level						9815 (4450)	9800 (4445)	7265 (3295)	7035 (3190)	29' 11" (9.1m)	5550 (2515)	5310 (2410)
Below Ground Level	5' (1.5m)			11090 (5030)	11090 (5030)	8705 (3950)	8705 (3950)	6745 (3060)	6745 (3060)	28' 3" (8.6m)	5740 (2605)	5725 (2595)
	10' (3.0m)	8500 (3855)	8500 (3855)	8630 (3915)	8630 (3915)	7365 (3340)	7365 (3340)	6010 (2725)	6010 (2725)	25' 5" (7.7m)	5910 (2680)	5910 (2680)
	15' (4.6m)	5840 (2650)	5840 (2650)	6640 (3010)	6640 (3010)	6075 (2755)	6075 (2755)			20' 11" (6.4m)	5930 (2690)	5930 (2690)
	20' (6.1m)									12' 10" (3.9m)	4875 (2210)	4875 (2210)




Shaded areas are stability rated
Based on machine with 0 lb. bucket

The rated lift capacity is based on the machine being equipped with 15,500 lb. (7030 kg) counterweight, standard boom and no bucket.

The load point is located on the bucket pivot point, including load listed for maximum radius.

Do not attempt to lift or hold any load greater than these rated values at specified load radii and heights. The weight of slings and any auxiliary devices must be deducted from the rated load to determine the net load that may be lifted.

ATTENTION: All rated loads are based on the machine being stationary and level on a firm supporting surface. For safe working loads, the user must make allowance for his particular job conditions such as soft or uneven ground, out of level conditions, side loads, hazardous conditions, experience of personnel, etc. The operator and other personnel must be fully trained and understand the Operator's Manual and Safety Manuals furnished by the manufacturer before operating this machine. Rules for safe operation of equipment must be adhered to at all times.

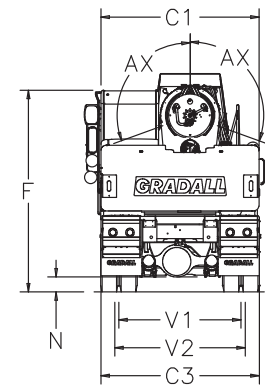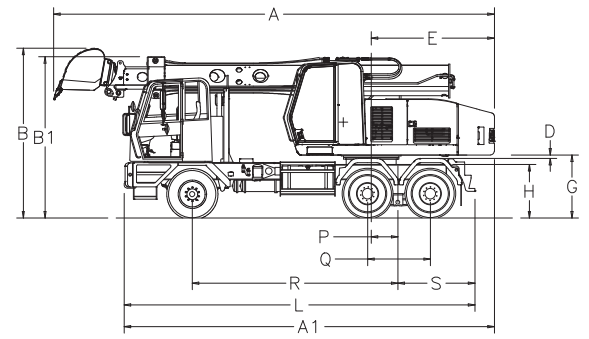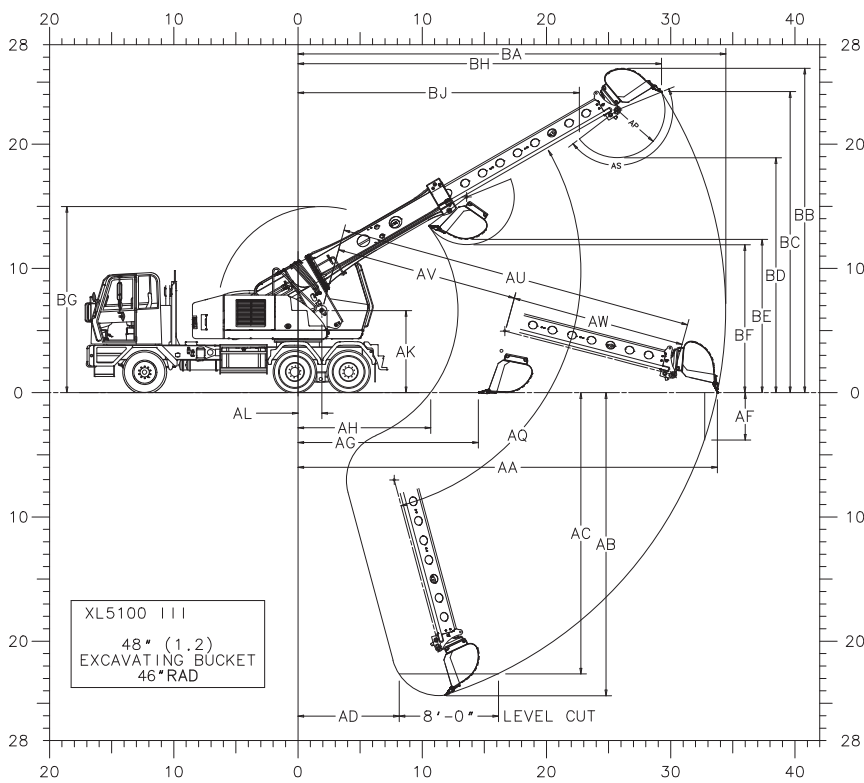

NOMENCLATURE AND DIMENSIONS FOR HYDRAULIC EXCAVATORS-SAE J1193 NOV84

6x4	6x6	Description	6x6	6x4	Description
A 30' 5" (9.3)	30' 5" (9.3)	Overall length (boom in rack) with bucket	AU 28' 8" (8.7)	28' 8" (8.7)	Maximum telescoping boom length (boom pivot to bucket pivot)
A1 25' 6" (7.8)	25' 6" (7.8)	Overall length (boom in rack) without bucket	AV 14' 8" (4.5)	14' 8" (4.5)	Minimum telescoping boom length (boom pivot to bucket pivot)
B 11' 9" (3.6)	12' 0" (3.7)	Overall height (boom in rack) with bucket	AW 14' 0" (4.3)	14' 0" (4.3)	Telescoping boom travel
B1 11' 2" (3.4)	11' 5" (3.5)	Overall height (boom in rack) without bucket	AX 110°	110°	Bucket tilt angle (both sides of center)
C1 8' 6" (2.6)	8' 6" (2.6)	Width of upperstructure	BA 34' 5" (10.5)	34' 5" (10.5)	Maximum radius of working equipment
C3 8' 6" (2.6)	8' 6" (2.6)	Width of undercarriage	BB 26' 1" (8.0)	26' 5" (8.0)	Maximum height of working equipment
D 3" (76mm)	3" (76mm)	Minimum clearance, upperstructure to undercarriage	BC 24' 3" (7.4)	24' 6" (7.5)	Maximum bucket tooth height
E 8' 6" (2.6)	8' 6" (2.6)	Swing clearance, rear of upperstructure	BD 18' 11" (5.8)	19' 2" (5.9)	Minimum clearance of bucket teeth, with bucket pivot at maximum height
F 10' 10" (3.3)	11' 1" (3.4)	Top of cab to ground line	BE 12' 4" (3.8)	12' 7" (3.8)	Minimum clearance of fully curled bucket at maximum boom height
G 52" (1.3)	56" (1.4)	Clearance, upperstructure to groundline	BF 11' 11" (3.6)	12' 2" (3.7)	Minimum clearance of bucket teeth at maximum boom height
H 44" (1.1)	48" (1.2)	Top of wheel mounted under carriage frame to groundline	BG 15' 0" (4.6)	15' 3" (4.7)	Maximum height of working equipment with bucket below groundline
L 24' 2" (7.4)	24' 2" (7.4)	Overall length of undercarriage	BH 29' 3" (8.9)	29' 3" (8.9)	Radius of bucket teeth at maximum height
N 10" (254mm)	10" (254mm)	Ground clearance (per SAE J1234)	BJ 22' 8" (6.9)	22' 8" (6.9)	Minimum radius of bucket teeth at maximum bucket pivot height
P 22" (564mm)	22" (564mm)	Center of rear tandem to axis of rotation			Rated bucket tangential force with 36" (914mm) bucket: 24,900 lb (111KN)
Q 52" (1.3)	52" (1.3)	Distance between centers of tandem axles			Rated telescoping boom crowd force: 24,500 lb (109 KN)
R 14' 3" (4.3)	14' 3" (4.3)	Wheelbase			WEIGHT
S 5' 4" (1.6)	5' 4" (1.6)	Center of rear axle to rear of frame (step)			Approximate working weight, fuel tank half full-
V1 6' 7" (2.0)	6' 7" (2.0)	Tread, rear axles (285/75R24.5 tires)			6 x 4: 57,670 lb (26,159 kg)
V2 7' 0" (2.1)	7' 0" (2.1)	Tread, front axle (385/65R22.5 tires)			6 x 6: 58,379 lb (26,488 kg)
AA 33' 9" (10.3)	33' 8" (10.3)	Maximum radius at groundline (165° pivot)			
AB 24' 5" (7.4)	24' 1" (7.3)	Maximum digging dept			
AC 22' 8" (6.9)	22' 4" (6.8)	Maximum depth for 8' level cut			
AD 8' 7" (2.6)	8' 7" (2.6)	Minimum radius of 8' level cut at depth "AC"			
AF 3' 10" (1.2)	3' 6" (1.1)	Maximum depth of vertical wall which can be excavated			
AG 14' 6" (4.4)	14' 6" (4.4)	Minimum level cut radius with bucket flat on groundline			
AH 10' 8" (3.3)	10' 5" (3.2)	Minimum radius at groundline			
AK 6' 7" (2)	6' 11" (2.1)	Boom pivot to groundline			
AL 23" (584mm)	23" (584mm)	Boom pivot to axis of rotation			
AP 46" (511mm)	46" (511mm)	Bucket tooth radius			
AQ 30° Up & 70° Dn	30° Up & 70° Dn	Boom pivot angle			
AS 165°	165°	Bucket pivot angle			

Specifications subject to change without notice.

Optional Equipment

Vandalism protection kit including window covers.

Intake air pre-cleaner.

Exhaust spark arrestor.

Strobe light.


Block heater.

Tilt steering column.


Auxiliary Hydraulics - Additional hosing and piping for hydraulic powered attachments. [Maximum pressure 4800 psi (33,095 kPa) Maximum flow 30 GPM (114 L/min)]




Part No.	Size	Capacity (Cu. yd.)	Capacity (m3)
8045-6020	24" (610mm) Excavating bucket	3/8	.31
8045-6021	30" (762mm) Excavating bucket	1/2	.41
8045-6022	36" (914mm) Excavating bucket	5/8	.54
8045-6023	42" (1.07m) Excavating bucket	3/4	.64
8045-6024	48" (1.22m) Excavating bucket	1	.76
8065-6117	48" (1.22m) Excavating bucket	1.5	1.15

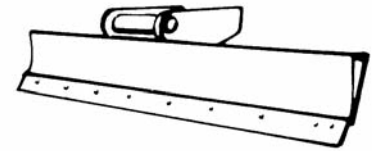


8065-6024 8' (2.4m) Grading blade

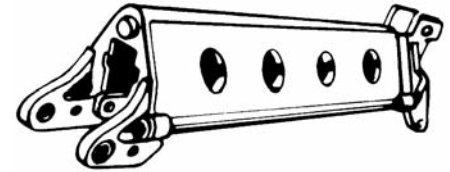


8065-5028 4' (1.2m) Boom extension
8065-5029 6' (1.8m) Boom extension
8065-5030 8' (2.4m) Boom extension
8065-5031 12' (3.7m) Boom extension

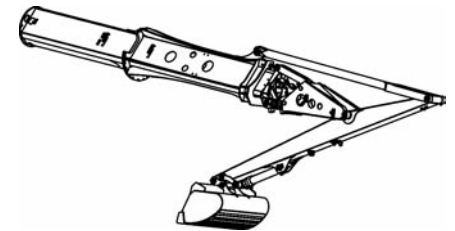


8055-5001 Telestick attachment

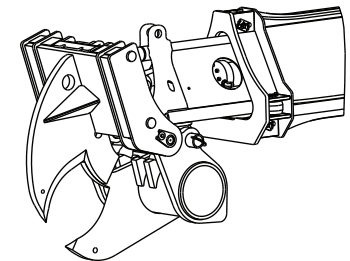

8045-5052 Tree Limb Shear Attachment

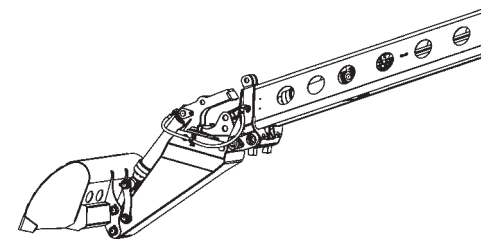


8045-5009 6' (1.8 m) Live Boom



8075-5023 Fixed thumb grapple

Attachments


Quick change and reversible buckets fabricated of steel plate, with high strength, low alloy cutting edges and wear strips. Standard attachments available for wide range of applications. Capacities shown are in heaped cu. yd.




Part No.	Size	Capacity (Cu. yd.)	Capacity (m3)
8065-6104	15" (381mm) Trenching bucket	1/5	.15
8065-6012	21" (533mm) Trenching bucket	1/4	.19



8065-6102	40" (1.02m) Pavement removal bucket		
8065-6119	48" (1.22m) Pavement removal bucket		



Part No.	Size	Capacity (Cu. yd.)	Capacity (m3)
8065-6007	60" (1.52m) Ditching bucket	7/8	.73
8065-6006	66" (1.68m) Ditching bucket	1	.76
8065-6002	72" (1.83m) Ditching bucket	1 1/8	.87
8065-6118	72" (1.83m) Ditching bucket	1.6	1.22



8065-6013	72" (1.83m) Dredging bucket	1 1/8	.87
-----------	-----------------------------	-------	-----

See photos of the XL 5100 just click here with your smart phone.



Get the free mobile app at <http://gettag.mobi>

It is Gradall Policy to continually improve its products. Therefore designs, materials and specifications are subject to change without notice and without incurring any liability on units already sold. Units shown may have optional equipment.

GRADALL®

406 Mill Ave. SW, New Philadelphia, Ohio 44663
Phone: 330-339-2211 Fax: 330-339-8468
www.gradall.com



Certified ISO 9001



Form No. 11106
Printed in USA
02/11